




STS 6040

Enclosed Automated Fuel Maintenance Systems

The STS 6040 Programmable Automated Fuel Maintenance System is designed to optimize and maintain diesel fuel indefinitely. Adding an STS 6040 system will remove particulate, separate water, and condition stored fuel. This innovative process stabilizes diesel and bio-fuels, eliminates microbial contamination, and ensures clean reliable fuel at all times. Generators operating in remote locations are ideal applications for STS 6040 systems.

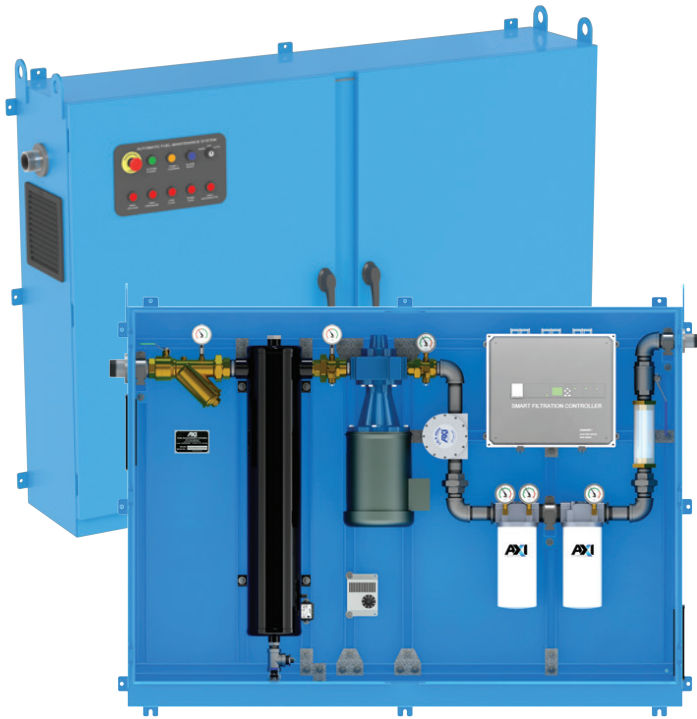

STS 6040 SPECIFICATIONS

Flow Rate (@60Hz)	40 GPM/2400 GPH (151 LPM/9085 LPH)
Wye-Strainer	20 Mesh
Mechanical Water Separator	Specific Gravity Separation and Particulate Removal
Primary Filter	1, 3, 10 or 25 μ Particulate or 3, 10 μ Water Block
Secondary Filter	1, 3, 10 or 25 μ Particulate or 3, 10 μ Water Block
Fuel Conditioner	LG-X 4000 Inline Conditioner
System Controller	Programmable, Fully Automated UL 508A SMART Filtration Controller with BMS/BAS Interface and Digital Text Readout
Pump	5 HP Gear Pump
Power	480V/3Ph/60Hz/15A or 230V/3Ph/50Hz/15A
Plumbing	Stainless Steel
Ports	2" NPT In 2" NPT Out
Enclosure Cabinet	NEMA 12 (IP55), 13 (IP65), 4 (IP66), and 4X (IP66) Powder Coat or Stainless Steel
Dimensions	56" x 72" x 17" (H x W x D) (142 x 183 x 43 cm)
Weight	\approx 1005 lbs (455.9 kg)
Not for use with fluids that have a flash point below 100°F (37.8°C).	

STS 6000 SERIES SAFETY FEATURES:

- Automatic Alerts
- Pump Shut Down When Filters Need Service
- Leak Detection
- Water Detection
- High Filter Vacuum
- High Pump Pressure
- Low Fuel Flow Alert
- Emergency Stop

SMART FILTRATION CONTROLLERS:

- Maintenance Alert Log File
- Runtime Totalizer
- Alarm History
- On-Screen Help

ALL STS SYSTEMS FEATURE:

- Multi-stage Water Removal and Particulate Filtration
- NEMA 12,13, 4, 4X Powder Coated or Stainless Enclosure
- UL508A Smart Filtration Controller
- Stainless Steel Plumbing



1.239.690.9589
1.877.425.4239 Toll Free
www.AXI-International.com


AXI.International

AXInternational

AXIFuel

AXIFuel

REV0201604001200

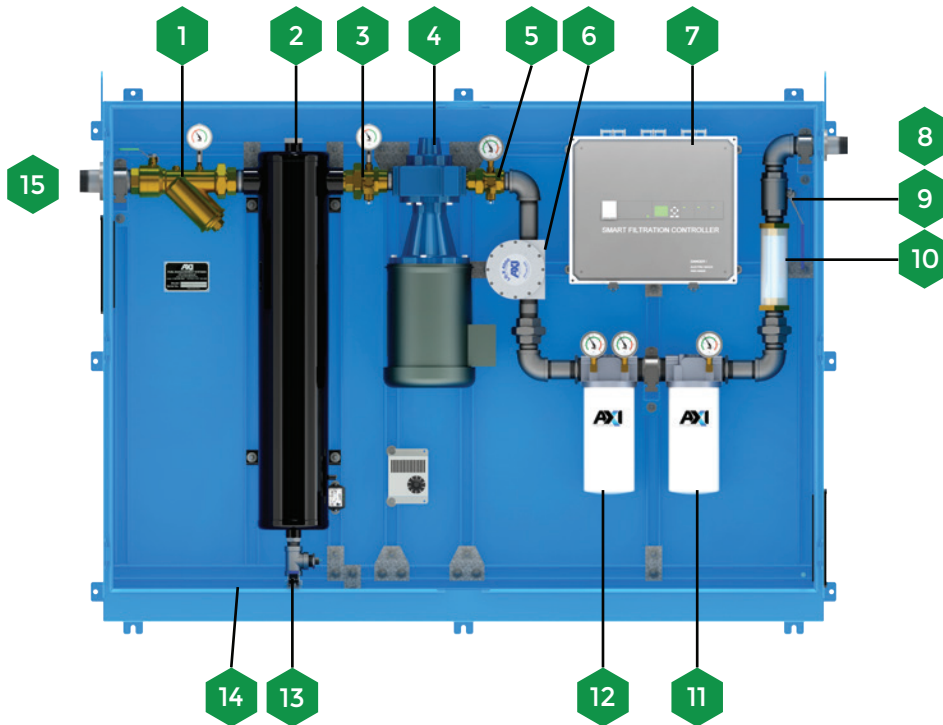

1. Primary Strainer
2. Mechanical Water Separator
3. Vacuum Switch
4. Gear Pump
5. Pressure Switch
6. AXI Inline LG-X 4000 Conditioner
7. Smart Filtration Controller
8. Fuel Outlet (Discharge)
9. Outlet Ball Valve
10. Flow Switch with Sight Glass
11. Secondary Fine Filter
12. Primary Fine Filter
13. Water Drain Valve
14. Leak Detector
15. Fuel Inlet (From Tank)

STS 6040 OPTIONS:

- AFC 705/710 Fuel Catalyst
- Stand
- Stainless Steel Enclosure
- Cabinet Color Options
- Cabinet Heater

REPLACEMENT FILTER OPTIONS:

Fine Filter	Part No.	Fine Filter	Part No.
3 μ Water Block Filter	WB-3	1 μ Fine Filter	FF-1
10 μ Water Block Filter	WB-10	3 μ Fine Filter	FFZ-3
		10 μ Fine Filter	FF-10

STS SYSTEM INTEGRATION:

